


Do It Right With BRANOPac

Usage

Storage

01 **Touching metal with bare hands**




Do not touch metal with bare hands, as sweat and organic acids leads to corrosion.

Touching metal with gloves



Always wear lint free nitrile gloves before handling the components and packaging.

Changing original packaging

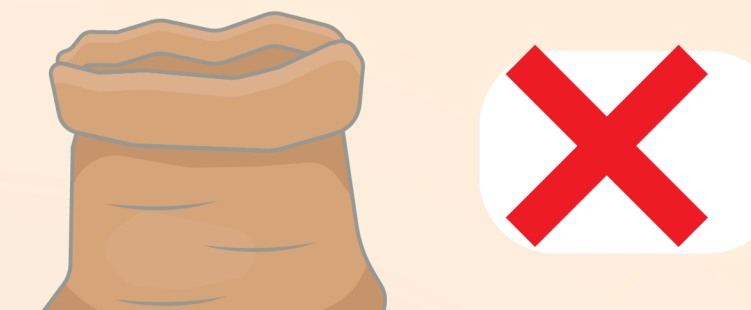

Do not shift the product from original packing to secondary packing

Using original packaging



Always keep the product in original packaging, as original packaging is designed to keep the property of the product intact.

Unsealed packaging




Do not leave the packaging unsealed or in the open for long, as it may lead to VCI loss.

Proper sealed packaging



Always tightly seal the packaging to avoid VCI loss.

Storing in hot and humid environment

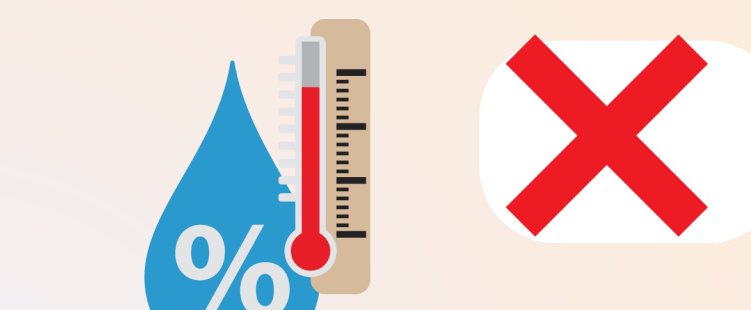

Do not store the product in high temperature and humidity; it leads to VCI loss.

Storing in cool and dry environment




Keep VCI packaging in a cool, dry place.

03 **Contact between product and Pallet**



If metal comes into direct contact with wood or cardboard, it may corrode because of organic acids and high moisture levels.

Zero contact between product and Pallet

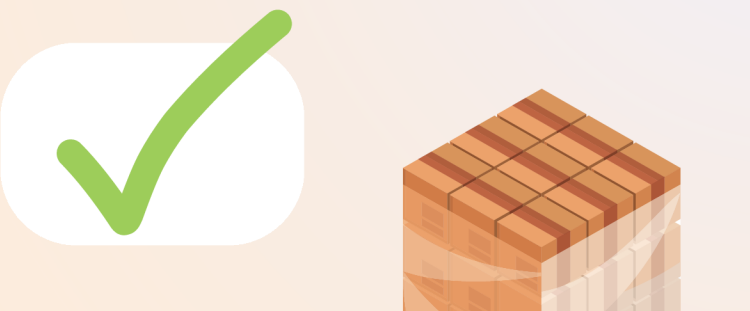

Keep metal away from wood or cardboard. Use a VCI layer to create a barrier between them.

Keeping the product opened and exposed




Do not leave the product exposed in open, as it leads to VCI loss.

Keeping it packed until no use



Always keep the product in tightly sealed packaging when not in use.

Pack components immediately after production

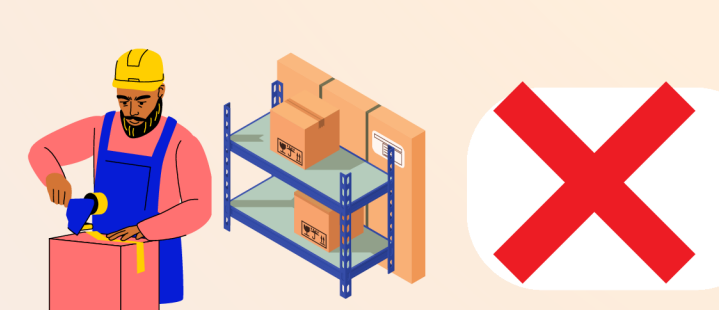

Do not pack the components immediately as they may be at a higher temperature after production.

Allow items to acclimatize before packing



Allow the components to adjust to room temperature before packing in VCI.

Directly Using the Product after a long storage time



Do not use the prolonged stored packaging as first layer might have lost VCI.

04 **Remove outer layer following longer storage period.**



Always remove the exposed layers of the VCI packaging before using the product after longer storage periods.



Remember to wash your hands and face following work